



A CRISIL-NSIC RATED COMPANY

ISO-9001-2008 COMPANY

Member Of



AIMCAL (USA)




A.M.P.E.R.E (EUROPE)

In Association With



ELECTRO MAGNETIC innovative technologies

Kerone Research & Development Centre (KRDC),
B/47, Addl. MIDC. Anand Nagar, Ambarnath (East), Thane- 421 506, India
Tel- +91-251-2620542/43/44/45/46, Email-info@kerone.com, www.kerone.com

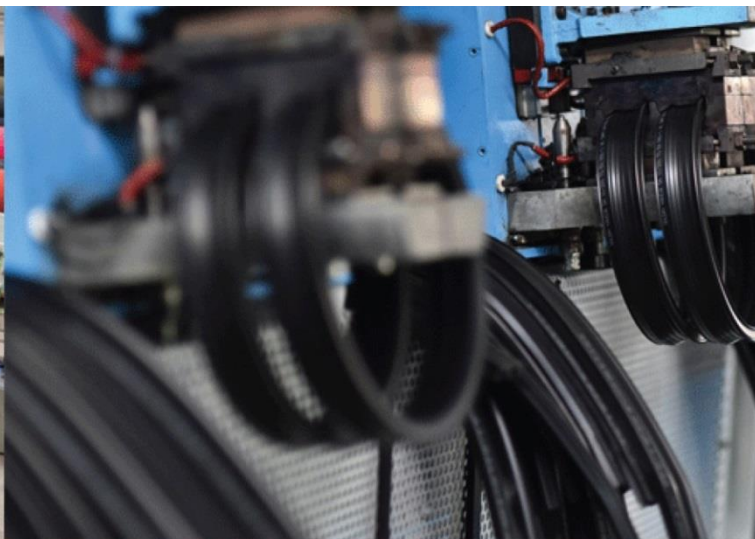

**Batch Microwave Heat Treatment for
Sterilization of Activated Carbon**

ISO 9001-2008 | ISO 9001-2015 | EMS 14001 | OHSAS 18001
In Association with SVCH-Technologii, Moscow (Russia)



Kerone Research & Development Centre (KRDC)

B/47, Addl. MIDC. Anand Nagar, Ambernath (East), Thane- 421 506, India
Tel- +91-251-2620542/43/44/45/46, Email-info@kerone.com, www.kerone.com

Customer :	M/s. BF Industries inc, Philippines
Process :	Batch Microwave Heat Treatment for Sterilization of Activated Carbon

TEST REPORT No: 47/KRDC/LAB/17 Mum 12/11/2019

Date Sample reception : 12/11/2019

ID : 47/LAB/141

SAMPLE DESCRIPTION:

Sampling : As Requested

Sample Condition : Acceptable

Quantity : 3 kg

Sampling date : 15/11/2019

Product : Activated Carbon

Requirement : Sterilization

Start Date test : 15/11/2019

End Date test : 15/11/2019

LABORATORY EXPERIMENTAL SET UP:



Format: F/R&D/01



Kerone Research & Development Centre (KRDC)

B/47, Addl. MIDC. Anand Nagar, Ambarnath (East), Thane- 421 506, India
Tel- +91-251-2620542/43/44/45/46, Email-info@kerone.com, www.kerone.com

LAB BATCH MICROWAVE+CONVECTION HEATING SYSTEM SPECIFICATIONS:

Microwave Power	2 kW(CW)
Frequency	2450 MHz \pm 50
Convective Power	3.5 kW (air flow 350 l/min at 20°C)
Microwave Exposure Zone (cavity)	1 cubic meter
Mode Stirrer	One
Thermal Monitoring System	Single Channel Fiber Optic: Range -40 to 250°C
Exhaust Power	1HP
Tray Size	450x950x50 mm



ENVIRONMENT-LABORATORY AMBIENT CONDITIONS:

Temperature (degree C)	33°C (\pm 5°C)
Humidity (%)	\leq 41% RH
Pressure (kN/m² or kPa)	Not recorded

Note for recommendation: Environmental conditions have a direct impact on test results. Accuracy and consistency of test data are affected by the laboratory conditions



EQUIPMENTS USED:

Name of Equipment	Picture of Equipment	Specifications
Compact Thermal Imaging Camera		Model: FLIR E-30 Resolution: 160x 120 IR Thermal sensitivity of 0.10°C
Thermo Hygrometer		Model No: HTC-2 Temperature accuracy: $\pm 1^\circ\text{C}$ (1.8°F) Temperature resolution: 0.1°C (0.2°F) Humidity range: 10%~99% RH Humidity accuracy: $\pm 5\%$ RH Humidity resolution: 1% RH

SAMPLE PREPARATION AND METHOD/PROCEDURE:

The experiment has been performed on given sample of activated carbon powder to speed up the heating rate for sterilization treatment. For this experimental run, given sample has been sealed packed in microwave transparent bags and placed in microwave heating system for different setting parameters to achieve sterilization treatment. The observations are made on the basis of temperature on product and any damage to sample and bag.

ANALYTICAL RESULTS:

Weight taken for every trial: 0.5 kg

Sr. No.	MW Power (kW)	Time (minutes)	Temp. on product (°C)	Remarks, if any
1.	0.6	4.5	80-90	No change
2.	0.8	2.5	75-85	No change



ELECTRO MAGNETIC Innovative technologies



A CRISIL-NSIC RATED COMPANY
ISO-9001-2008 COMPANY

Kerone Research & Development Centre (KRDC)

B/47, Addl. MIDC. Anand Nagar, Ambarnath (East), Thane- 421 506, India
Tel- +91-251-2620542/43/44/45/46, Email-info@kerone.com, www.kerone.com

3.	1	1.5	65-75	No change
4.	1.5	1	60-70	No change
5.	2	0.67(40 seconds)	60-70	No change

THERMAL IMAGE SHOWING PRODUCT TEMPERATURE PROFILE:


1. Before Heat Treatment:

Measurements

Bx1	Max	29.0 °C
	Min	28.1 °C
	Average	28.6 °C
Sp1		28.4 °C

Parameters

Emissivity	0.95
Refl. temp.	20 °C

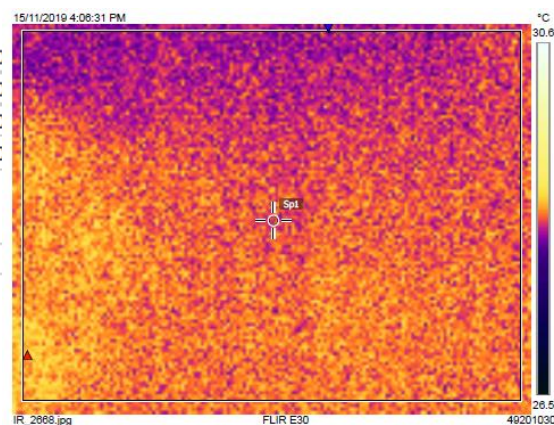


2. After Heat Treatment:

Measurements

Bx1	Max	89.5 °C
	Min	85.0 °C
	Average	87.6 °C
Sp1		88.4 °C

Parameters

Emissivity	0.95
Refl. temp.	20 °C

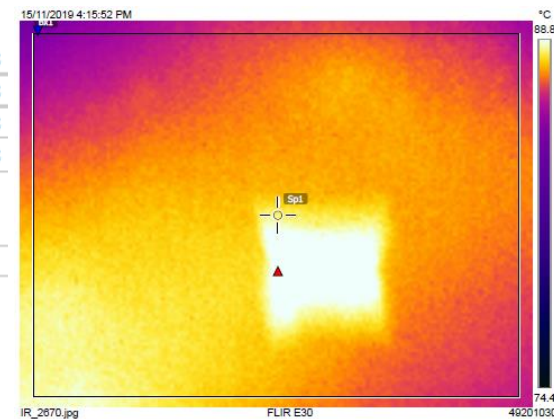

Format: F/R&D/01

The value obtained is already corrected for possible recover value stated, if applicable. This document may not be reproduced or disclosed wholly or partly in any part thereof without the written consent of the laboratory management or customer. This document relates only to the specimen samples processed. The processed sample will be kept in this laboratory for 7 days from the date of heat treatment.



Kerone Research & Development Centre (KRDC)

B/47, Addl. MIDC. Anand Nagar, Ambarnath (East), Thane- 421 506, India
Tel- +91-251-2620542/43/44/45/46, Email-info@kerone.com, www.kerone.com

BEFORE AND AFTER PICTURES OF TREATED SPECIMEN SAMPLE:



OBSERVATIONS:

The heating behavior of Activated Carbon Powder has been investigated under the microwave irradiation mode for sterilization treatment. As per physical investigation, it has been observed that there is no colour change in sample with required temperature on product and no damage to bag.

K Komal

Miss. Komal Bhoite
Tested By